
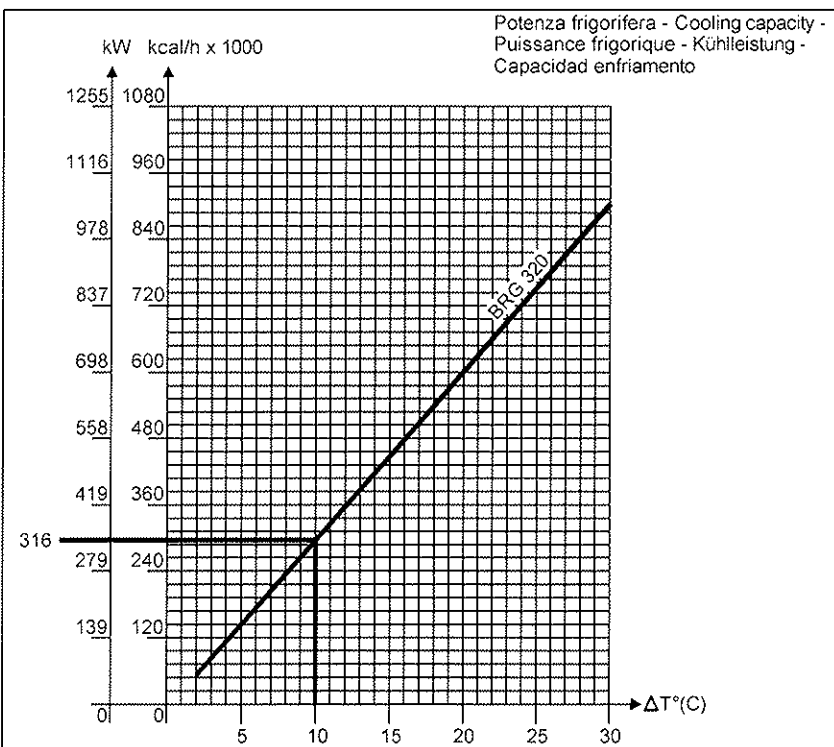


BRG 320

Resa frigorifera $\Delta T10$ Cooling capacity $\Delta T10$ Puissance frigorifique $\Delta T10$ Nennkühlleistung $\Delta T10$ Capacidad enfriamiento $\Delta T10$		Potenza pompa Pump power Puissance pompe Pumpenleistung Potencia bomba	Portata pompa Pump flow rate Débit pompe Pumpe Durchflußmenge Caudal bomba	Prevalenza pompa Pump Pressure Pression pompe Pumpendruck Presión bomba	Potenza ventilatori Fans power Puissance ventilateurs Ventilatoren Leistung Potencia ventiladores	Portata ventilatori Fans flow Débit ventilateurs Ventilat. Durchflußmenge Caudal ventiladores
kW	kcal/h	kW ass./inst.	min. l/min nom. max.	max. bar nom. min.	n° kW ass./inst.	m³/h
316	272.000	1,3/1,5	250 466 550	1,8 1,4 1	5x 1,3/1,5	90.000

Resa frigorifera $\Delta T5$ Cooling capacity $\Delta T5$ Puissance frigorifique $\Delta T5$ Nennkühlleistung $\Delta T5$ Capacidad enfriamiento $\Delta T5$		Rumorosità Noise Bruit Geräusch Ruido	Capacità interna Internal capacity Capacité intérieur Innerekapazität Capacidad interior	Peso a vuoto Net weight Poids net Leergewicht Peso en vacío	Peso con acqua Weight with water Poids avec eau Gewicht mit Wasser Peso con agua	Dimensioni imballo Packaging dimensions Dimensions emballage Verpackungsabmessung. Dimensiones embalaje	Peso imballo Packaging weight Poids emballage Verpackungsgewicht Peso embalaje	
kW	kcal/h	UNI 7712 dB(A)		litri	kg	kg	mm	kg
		1m	10m					
162	140.000	86	66	255	1.450	1.705	5450x1500x2800h	750

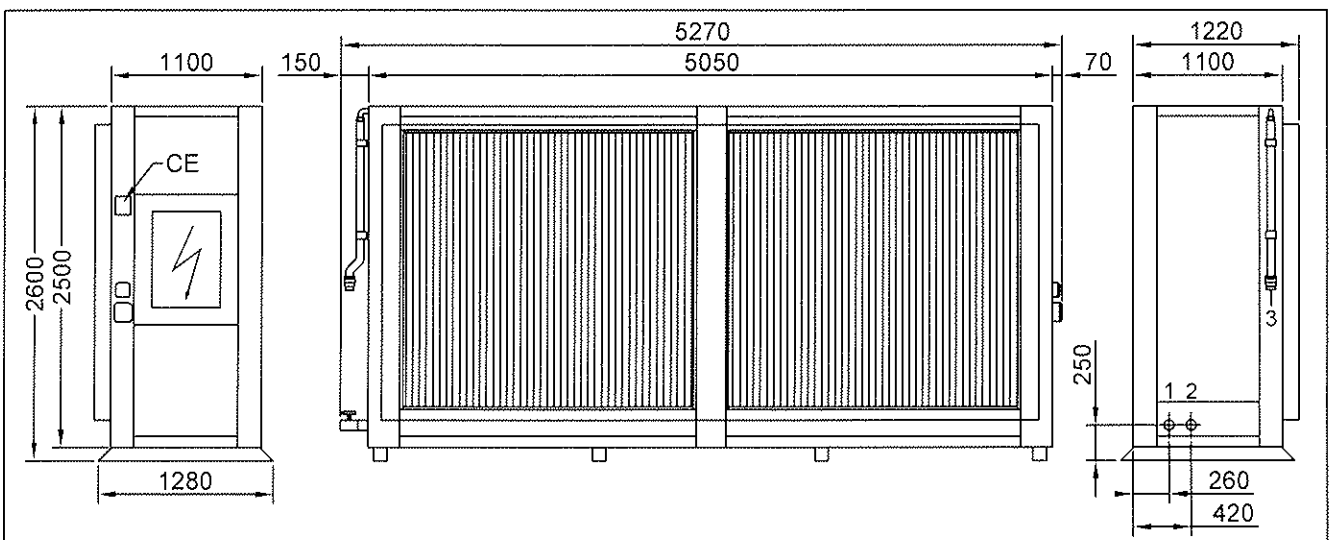

1	Entrata acqua - Water inlet - Entrée eau - Zufluss wasser - Entrada agua	$\varnothing 2''1/2$
2	Uscita acqua - Water outlet - Sortie eau - Ausfluss wasser - Salida agua	$\varnothing 2''1/2$
3	Sfiato / Scarico continuo Bleed / Continuous discharge Echappement / Continu ecoulement Entlüferohr/Unaufhörliche entleerung Desfogue / Descarga continuo	$\varnothing 1''1/2$

Potenza elettrica totale Total electric power Puissance électrique totale Gesamtstromstärke Potencia eléctrica total	ass.	8,5 kW
	inst.	9,5 kW

Corrente Max Max. Current Courant max. Max. Spannung Corriente máx.	A
	18

Magnetotermico Magnetothermic Switch Interr. Magnétothermique Magnetothermis. Schalter Interr. Magnetotérmico	A
	25

400V - 3 - 50Hz	
07.11.05	P510012.01